

DÉSA™

Digital Video Recorders

- Windows® 2000-based Digital Recorder
- Average File Size 3–6 KB
- 120–240 IPS Frame Rate
- Remote Multiserver Access
- Limited Remote Administration
- Local & Remote PTZ Control
- Intelligent Search Engine
- Video Authentication
- Remote Event Notification
- Bandwidth Throttle



The Philips DÉSA is a Windows® 2000-based digital recorder that produces an amazing 120–240 images per second, with average file sizes of 3–6 KB per image. This unit has 16 video inputs with independently configurable frame rate settings. The DÉSA features 16 alarm inputs and 16 auxiliary outputs.

When an alarm is triggered, notification is sent to an administrator, providing remote event notification. On activation of alarms, the DESA may be configured to execute pre-positions from multiple AutoDome® cameras. The DÉSA has pre-alarm recording capability, allowing video capture *prior* to an alarm event. There are also five independently configurable motion detection zones per camera.

Both live and recorded video are accessible via the included remote viewing software. The remote software also provides system configuration and PTZ control, supporting up to 16 DÉSA units. Video is easily offloaded and distributed as proprietary or AVI files using the standard CDRW.

Local PTZ control is accomplished directly via the user interface,

providing complete control over Philips' AutoDome Series¹. Other manufacturers' units are also supported.

Secure operation is achieved via 6 user levels, assigned to grant or deny access to system administration functions, recorded video access, and PTZ control. The advanced scheduling feature of DÉSA allows customization of recording parameters based on time, day of the week, motion, and alarm input. The DÉSA is easily configured to record based on your unique needs!

The E-Map feature provides the capability to load a bitmap image of your facility, then drag and drop camera and alarm icons to create an overview of your installation. Simply click on the E-Map's camera icons to view video from the selected camera.

Single channel audio recording is available by plugging a microphone into the unit. The DÉSA also supports two-way audio, for listening in and talking to the site using the remote viewing software.

¹Note: RS-232 to Bi-phase converter required.

SPECIFICATIONS

	MODEL	
	DRI61XX	DRI62XX
Composite Output	Full Screen	Full Screen
Display (Max) IPS	120	240
Video Input-Cameras	1 to 16	1 to 16
Max Record FPS	120 (1-4 cam), 80 (5-16 cam)	240 (1-8 cam), 160 (9-16 cam)
Digital Audio Recording	1-channel	1-channel
External Alarm Input/ Auxiliary Output	16/16	16/16
SVGA Display	1024 x 768	1024 x 768
Standard HDD	120, 240, 360, 480 GB	120, 240, 360, 480, 600 GB
Memory	256 MB	512 MB

Max Recording Speed:

	320 x 240 1-4 cameras	320 x 240 5-16 cameras	640 x 480 1-4 cameras	640 x 480 5-16 cameras
DRI61XX:	120 ips	80 ips	40 ips	80 ips
DRI62XX:	240 ips	160 ips	40 ips	80 ips

Average Record Days:

	DISK FORMAT (GB) / RECORD SPEED (IPS)					
	GB IPS	120 16	240 30	360 60	480 80	600 120
DRI61XX:						
Continuous Recording	30 days	30 days	23 days	23 days	—	
15% Motion Recording	200 days	200 days	153 days	153 days	—	
DRI62XX:						
Continuous Recording	30 days	30 days	23 days	23 days	20 days	
15% Motion Recording	200 days	200 days	153 days	153 days	133 days	

NOTE: The above record calculations are examples based on continuous or motion at 15% recording with 320 x 240 resolution and 3 KB file size with a normal quality setting.

Electrical

Power Supply:

Pentium-4 Power Supply.
Full Range 115-230 VAC 60-50 Hz.
460 W with PFC (572 W Max).

Video:

Display Resolution: 160 x 120, 320 x 240, 640 x 480 NTSC.
Input: 1 Vp-p composite video signal, 75 Ω.
Output: 1 Vp-p composite video signal, 75 Ω.

SVGA: One (1) DB 15.

Audio: 1-channel (line in or mic in, line out).

Connectors:

Video Input: BNC.
Video Output: RCA.
Audio: 1/8-inch mini phone jack.
SCSI-2: HD50 (interface to disk array).
RJ-45: 10/100 MB base-T ethernet.

Alarms:

Alarm Inputs: Sixteen (16) programmable N/O, N/C dry contacts.
Alarm Outputs: Sixteen (16) programmable output relays.

Removable HDD: Standard.

Image Compression: Proprietary compression.

(Based on enhanced MJPEG and H.263 compression technology.)

Image Integrity: Proprietary Codec, time/date stamp, watermark authentication.

VGA Card: AGP 32 MB RAM.

Resolution/Average File Size: 160 x 120/1.5 KB;
320 x 240/3 KB; 640 x 480/6 KB.

PTZ Control: One (1) RS-422, one (1) RS-232* output supplied.

* **Note:** LTC 8786/60 Series data converter is required for RS-232 conversion to bi-phase.

Remote PC Requirements

Processor: Pentium III, Pentium 4 or AMD,
700 Mhz minimum.

Memory: 128 MB minimum, 256 MB recommended

Video: Dedicated AGP Graphics Adapter 32 MB RAM
minimum 32 bit color or better.

Caution: Recommended ATI Radeon or nVidia gForce graphics boards. The software does not support video cards based on SiS or Riva TnT2 chipsets. System will not support onboard, integrated graphics adapter with shared memory.

Monitor: SVGA or XVGA set to 1024 x 768 resolution at
60 Hz refresh rate.

Hard Disk: 500 MB of free disk space.

Operating System: Windows 98SE, Windows NT 4.0 SP6,
Windows 2000 Pro SP3 or Windows XP Pro.

Browser: Internet Explorer 5.5 or greater is required.

Note: In the case of installing the Remote Client software on Windows NT 4.0, it is important to upgrade the version of Windows Scripting to 5.2 or greater. Versions below 5.2 will cause issues with installation.

Mechanical

Dimensions: 17 W x 20 D x 7 H in.

Weight: 35–60 lb based on model.

Environmental

Temperature: 5° to 40°C (41° to 105°F).

Relative Humidity: 0 to 90%, noncondensing.

Product Regulatory Compliance

Electromagnetic Compatibility (EMC):

Complies with FCC Part 15, ICES-003 and CE regulations.

Product Safety:

Complies with CE regulations, UL, CSA, EN and IEC Standards.

Warranty: 3 years.

Accessories (Optional)

LTC 8786/60 – RS-232 to bi-phase converter.

DVAD – LP Disk Array Storage.

DVAS – RAID Disk Array Storage.

Recommended Accessories (Third Party Manufacturers)

StarTech.com (Starview) KVM's.

UPS (Uninterruptable Power Supply).

Norton Antivirus™.


McAfee Virus Scan.

Ordering Information

Use the below chart to create your part number based on the following example:

DR16124:

- DÉSA
- 16-channel
- 120 ips
- 240 GB

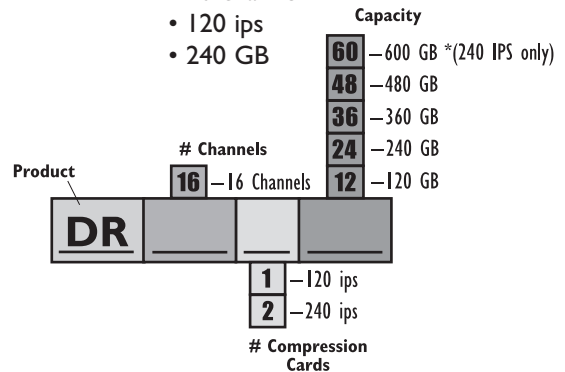

DÉSA Part Numbering Structure

Distribuição : ALARMES TUCANO
Fone/fax : 41 3286-2867 Curitiba - PR
www.tucanobrasil.com.br - tucano@tucanobrasil.com.br
www.securitybosch.com.br

Windows® and Windows NT®, are registered trademarks of Microsoft Corporation.
Norton Antivirus™ is a trademark of Symantec Corporation.
McAfee is a business unit of Network Associates, Inc.

9498 961 61715 03-26
Printed In U.S.A.

© 2003 Bosch Security Systems, Inc.
All Rights Reserved. Philips® is a registered trademark of
Philips Electronics N.V.
Updated June 27, 2003. Data subject to change without notice.
Refer to www.boschsecuritysystems.com for latest information.



PHILIPS

Let's make things better.